


E-IDS v2 — Admin Manual

Electronic Inspection Defect System (E-IDS v2) *Operational Manual for System Admins*


Updated 2026-08-06. This is the Admin-focused edition of the full E-IDS v2 User Manual — it covers everything an Admin needs: project setup, oversight of Inspector and Contractor work, sign-off, and system configuration. A few screenshots below predate the latest UI refresh (button labels changed) — the described behavior is current.

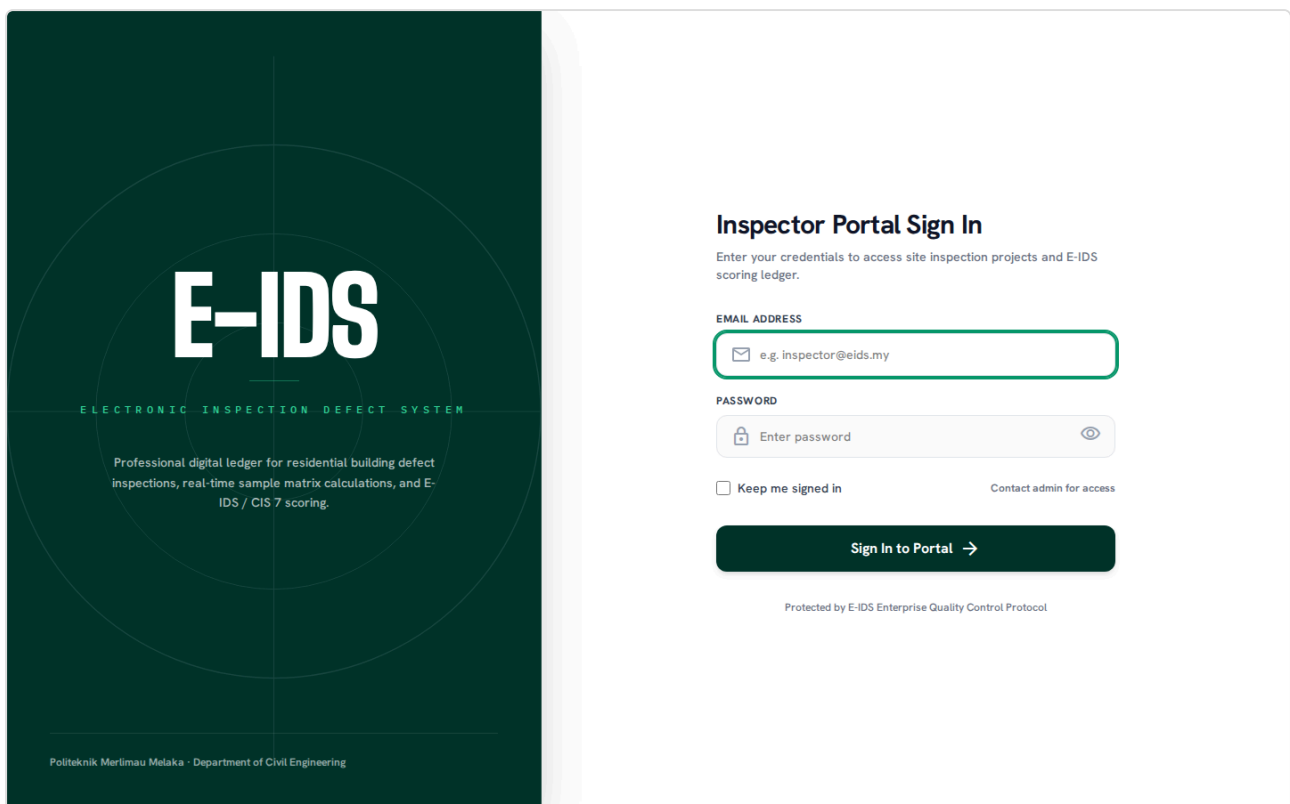

The sign-in screen every role shares — the same login form routes Admin, Inspector, and Contractor to their own scoped view of the system.


1. System Overview

E-IDS v2 is a specialized web-based building defect inspection and scoring platform for the Malaysian construction sector, implementing **CIS 7:2021** (CIDB's Construction Industry Standard) natively rather than approximating it. As Admin, you sit at the top of every project: you register it, assign who works it, and hold the exclusive keys to system-wide configuration.

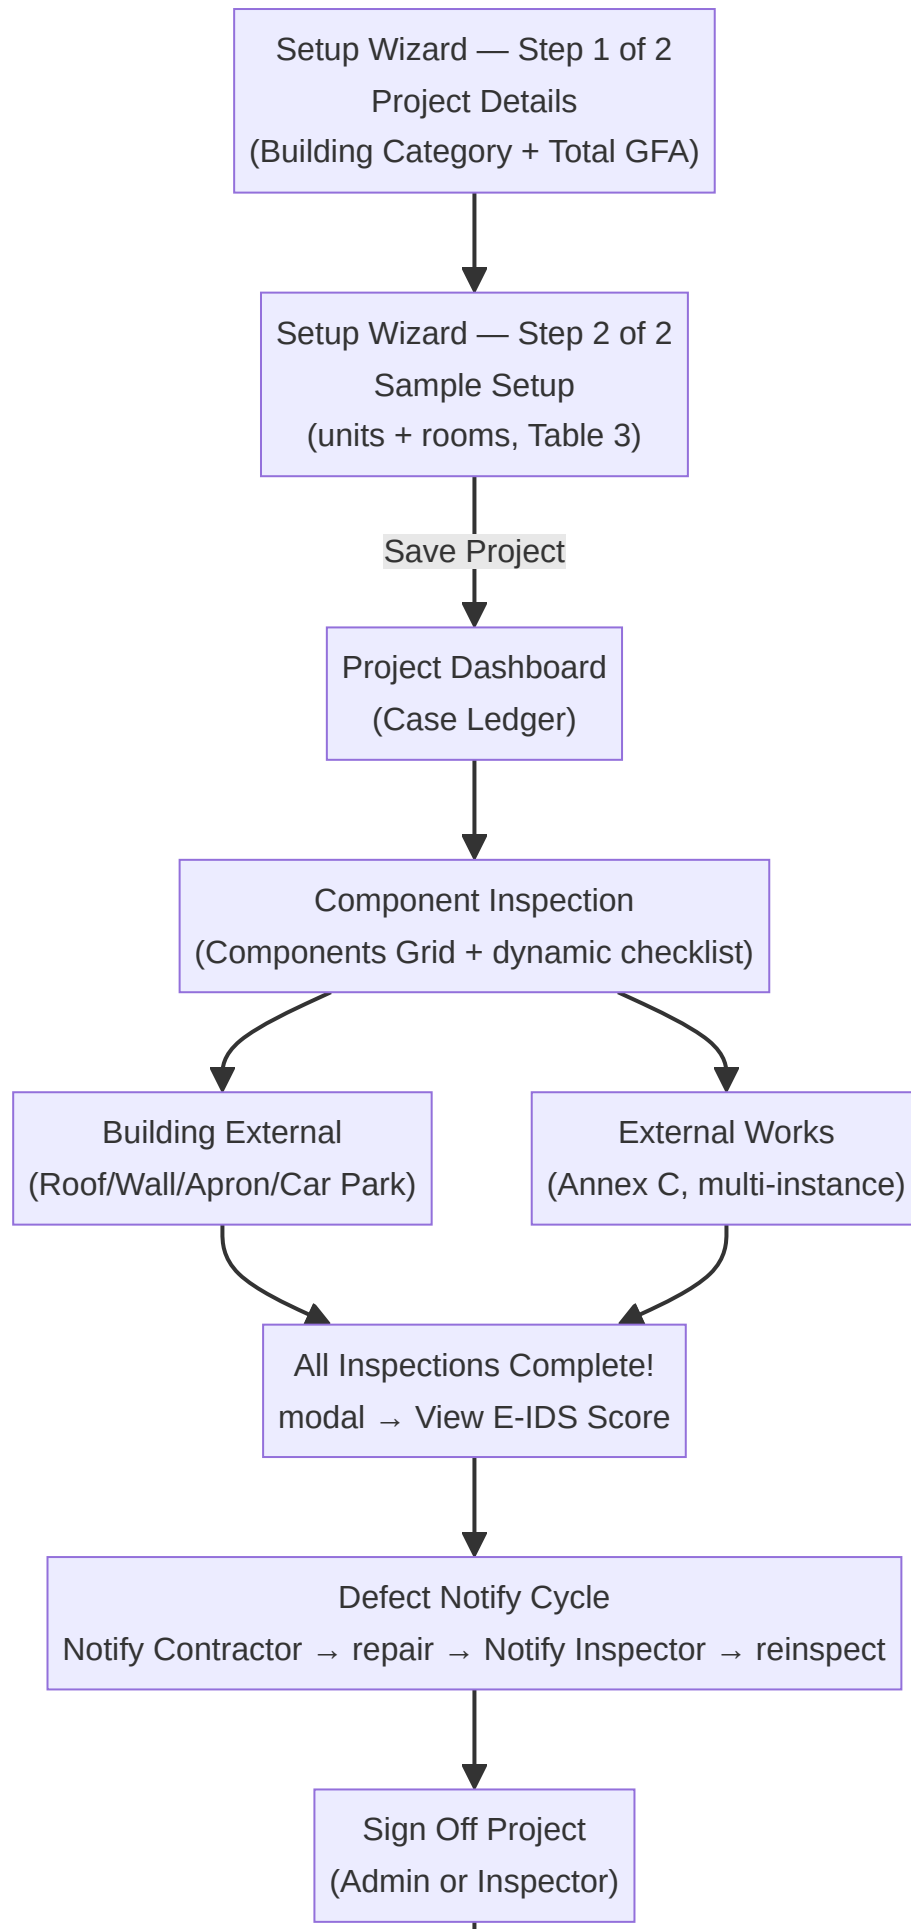

Official Signed PDF Certificate

You perform the first stage yourself (project registration), hand off the middle stage to your Inspector and Contractor, and hold final authority over system configuration throughout — though sign-off itself can now be done by either you or the Inspector once every defect is closed.

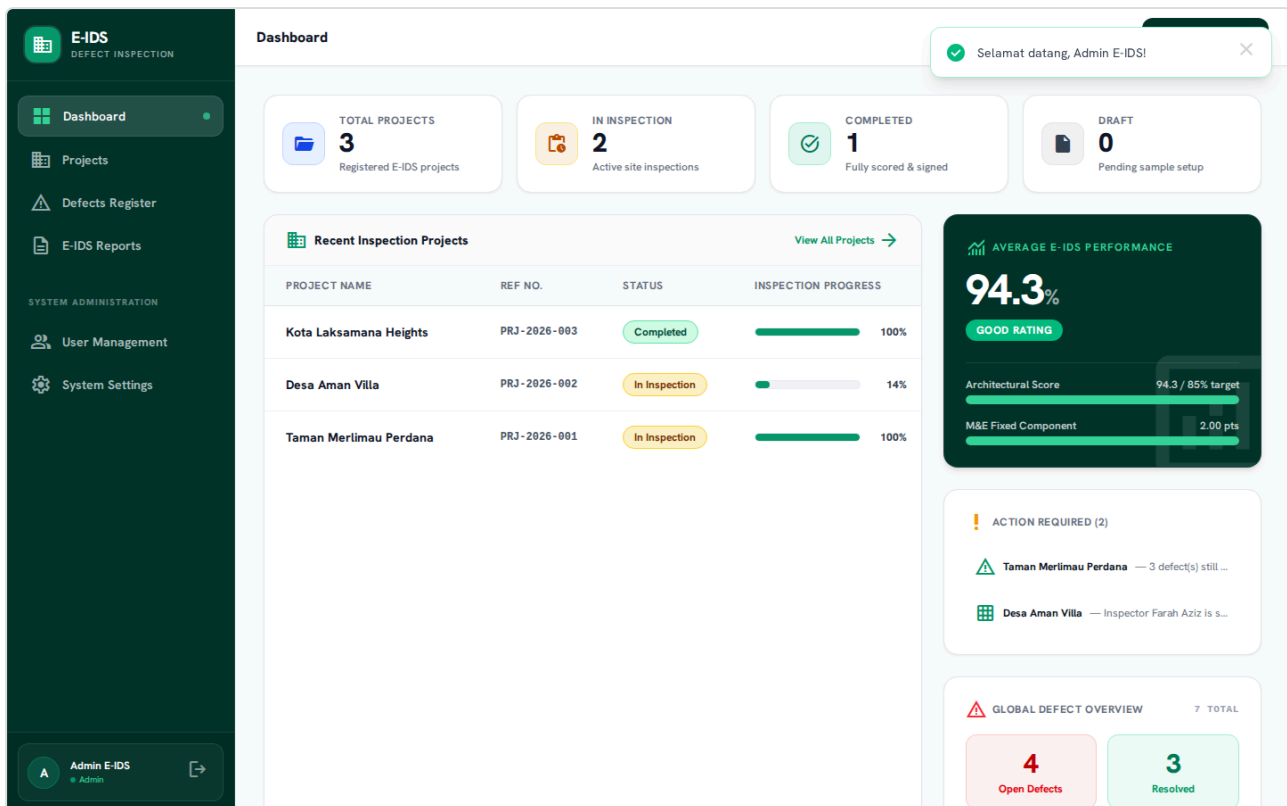

Your landing page — project totals, the average score across every project in the system, and an Action Required list.

2. Your Role, and Everyone Else's

□ **You (Admin).** The office-side owner of the whole portfolio. You register projects, decide who inspects them and which contractor is on the hook for repairs, and hold the exclusive keys to system-wide configuration — user accounts, the CIS 7:2021 weightage/sampling tables, and the question bank's content and Guide material. You can see and open every project in the system, and can step into any Inspector-facing screen (Sample Setup, Notify Contractor, Sign Off) if needed — but day-to-day inspection work is normally your Inspector's job.

□ **Inspector.** The field role. Sees only the projects they're assigned to, and owns everything that happens on site: naming sample locations, running the Components Grid checklist, completing

Building External and External Works, and reinspecting a Contractor's repair before confirming it resolved. An Inspector can also **Sign Off** a project themselves once every defect is closed — they don't have to hand that final step back to you.

❑ **Contractor.** The narrowest role. Logs in directly to **My Defects** — no Dashboard, Projects list, or Reports access, because there's nothing for them to do there. Their whole job: get notified about a defect, mark it in progress, mark it settled once fixed, and repeat. They can never mark their own work fully **RESOLVED** .


Permission Matrix

Action / Capability	Admin	Inspector	Contractor
View Dashboard, Projects & Reports	✓ all	✓ assigned	✗
Download Official PDF Report	✓ all	✗ (view score only)	✗
Register & Edit Projects	✓	✓	✗
Assign the Inspector (assigned_to)	✓	✗ (locked to self)	✗
Assign the Contractor (assigned_contractor_id)	✓	✓	✗
Configure Sample Locations & Optional Elements	✓	✓	✗
Perform Component Inspection Checklists	✗ (handed off to Inspector)	✓	✗
Add/Remove External Works Instances	✓	✓	✗
Declare QP Certifications	✓	✓	✗
View Defects Register / My Defects	✓ all	✓ assigned projects	✓ own-assigned project only
Create / Manually Log a Defect	✓	✓	✗
Notify Contractor about Open Defects	✓	✓	n/a
Mark Defect IN_PROGRESS ("Start Repair")	✓	✓	✓
Mark IN_PROGRESS → PENDING_VERIFICATION ("Mark Settled")	✓	✓	✓
Confirm RESOLVED or Reject back to IN_PROGRESS	✓	✓	✗
Sign Off Project	✓	✓	✗
Manage Users & Role Access	✓	✗	✗
Edit Weightage/Sampling Tables & Question Bank	✓	✗	✗

Action / Capability	Admin	Inspector	Contractor
Delete Project	✓	✗	✗

⚠ **Important** Opening a project or defect you don't have visibility into — from a list or by typing the URL directly — returns "Forbidden" for every role except Admin. You are the only role with no scoping restriction.

3. Defect Lifecycle & Status Workflow

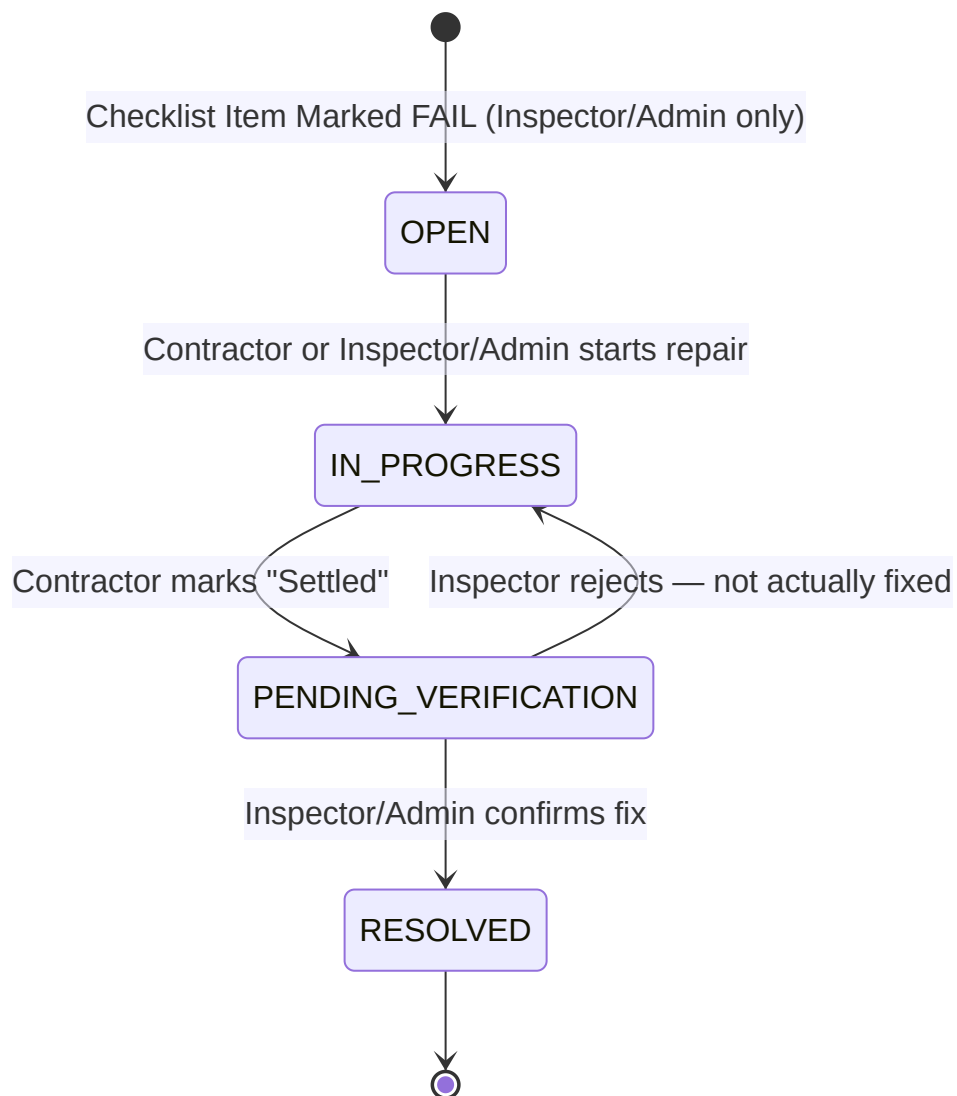

⚠ **Important Who updates defect status?** The Contractor updates the repair steps themselves (`IN_PROGRESS` , `PENDING_VERIFICATION`). The final `RESOLVED` confirmation —

and the ability to reject a repair back to **IN_PROGRESS** — is reserved for the **Inspector or Admin**. A Contractor can never self-certify their own work as fully resolved.

1. **OPEN** — auto-created when any checklist question is marked **FAIL**, or manually logged. Visible to the assigned Contractor's My Defects and the office's Defects Register.
2. **IN_PROGRESS** — the Contractor clicks **Start Repair**. You or the Inspector can also set this manually.
3. **PENDING_VERIFICATION** — the Contractor clicks **Mark Settled**, which notifies the Inspector to reinspect. The Contractor can't advance it further themselves from here.
4. **RESOLVED** — the Inspector or you confirm the fix on-site with **Confirm Resolved**, or send it back with **Reject – Not Fixed**.

DETECT / LOCATION	PROJECT	SEVERITY	STATUS	ACTIONS
Ceiling (Siling) Living Room FAIL on A3_CEILING (Ceiling (Siling)) at Living Room.	PRJ-2024-003 Kota Laksamana Heights	Low	Resolved	Reopen
Internal Fixtures Service Area FAIL on A6_FIXTURES (Internal Fixtures) at Service...	PRJ-2024-003 Kota Laksamana Heights	Low	Resolved	Reopen
Door (Pintu) Living Room FAIL on A4_DOOR (Door (Pintu)) at Living Room.	PRJ-2024-002 Desa Aman Villa	Low	Open	Start Repair
Roof (Bumbung) Roof (Bumbung) - Section 1 FAIL on A7_ROOF (Roof (Bumbung)) at Roof...	PRJ-2024-001 Taman Merlimau Perdana	Medium	Resolved	Reopen
Internal Wall (Dinding Dalam) Living Room FAIL on A2_WALL (Internal Wall (Dinding Dalam)) at...	PRJ-2024-001 Taman Merlimau Perdana	Medium	Open	Start Repair
Window (Tingkap) Living Room FAIL on A5_WINDOW (Window (Tingkap)) at Living...	PRJ-2024-001 Taman Merlimau Perdana	Low	In Progress	Mark Settled
Floor (Lantai)	PRJ-2024-001		Pending	Confirm Resolved Reject - Not Fixed

4. Component Inspection, M&E, and External Works — What Your Inspector Is Doing

Each of the 8 architectural components (Floor, Internal Wall, Ceiling, Door, Window, Internal Fixtures, Roof, External Wall) has its own question bank straight out of CIS 7:2021's Annex A — Floor alone has 17 questions. You manage this content (§6); your Inspector answers it project by project.

- **Room-scoped** components (Floor, Internal Wall, Ceiling, Door, Window, Internal Fixtures) — inspected at each sample room, in the **Components Grid**.
- **Building-scoped** components (Roof, External Wall, Apron & Perimeter Drain, Car Park) — sampled as building-level sections on their own page, sample count scaling with unit count.
- **M&E Fittings (Annex B)** — a 6-question checklist assessed at the same room samples.
- **External Works (Annex C)** — Link-way/Shelter, External Drain, Roadwork, Footpath & Turfing, Fence & Gate, Playground, Court, Swimming Pool, each supporting multiple instances of the same element.
- **QP Declarations** — Skim Coat/Prepacked Plaster and Wet-area Water-tightness aren't inspected on-site; they're Qualified Person certifications attached as evidence on the project page.



E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Admin E-IDS

Admin

Dashboard

Taman Merlimau P...

Grid

Living Room / A1_FLOOR

01 Project Details

02 Sample Setup

03 Components Grid

04 Inspection

95.7 GOOD

Existing assessment loaded for A1_FLOOR

Last saved 3 hours ago

TAMAN MERLIMAU PERDANA · COMPONENT 1 OF 7

Floor (Lantai) (A1_FLOOR)

Unit #1 · Living Room · Sample #1

ARCHITECTURAL WEIGHT

18.0%

CALCULATED COMPONENT RESULT

PASS

Inspection Checklist (17 Questions)

NO.	INSPECTION QUESTION	METHOD / TOOL	LIMIT	GUIDE	RESULT
1	No construction stains on the floor surface.	Visual	-	—	PASS FAIL
2	Floor colour and tone are uniform.	Visual	-	—	PASS FAIL
3	Floor surface is smooth and even (not rough or patchy).	Visual	-	—	PASS FAIL
4	No foreign materials on the floor surface.	Visual	-	—	PASS FAIL


5. E-IDS Scoring Framework (CIS 7:2021)

$$S_{\text{total}} = S_{\text{arch}} + S_{\text{ME}} + S_{\text{external}}$$

Category	Architectural	M&E	External
A — Landed Housing	85%	2%	13%
B — Stratified Housing	83%	3%	14%
C — Commercial/Industrial (no CCS)	82%	4%	14%
D — Commercial/Industrial (with CCS)	80%	5%	15%

Note

- ☐ **GOOD:** Total score ≥ 85.00 pts ·
 ☐ **MODERATE:** ≥ 70.00 and < 85.00 ·
 ☐ **WEAK:** < 70.00 (thresholds are admin-configurable in §7 below)

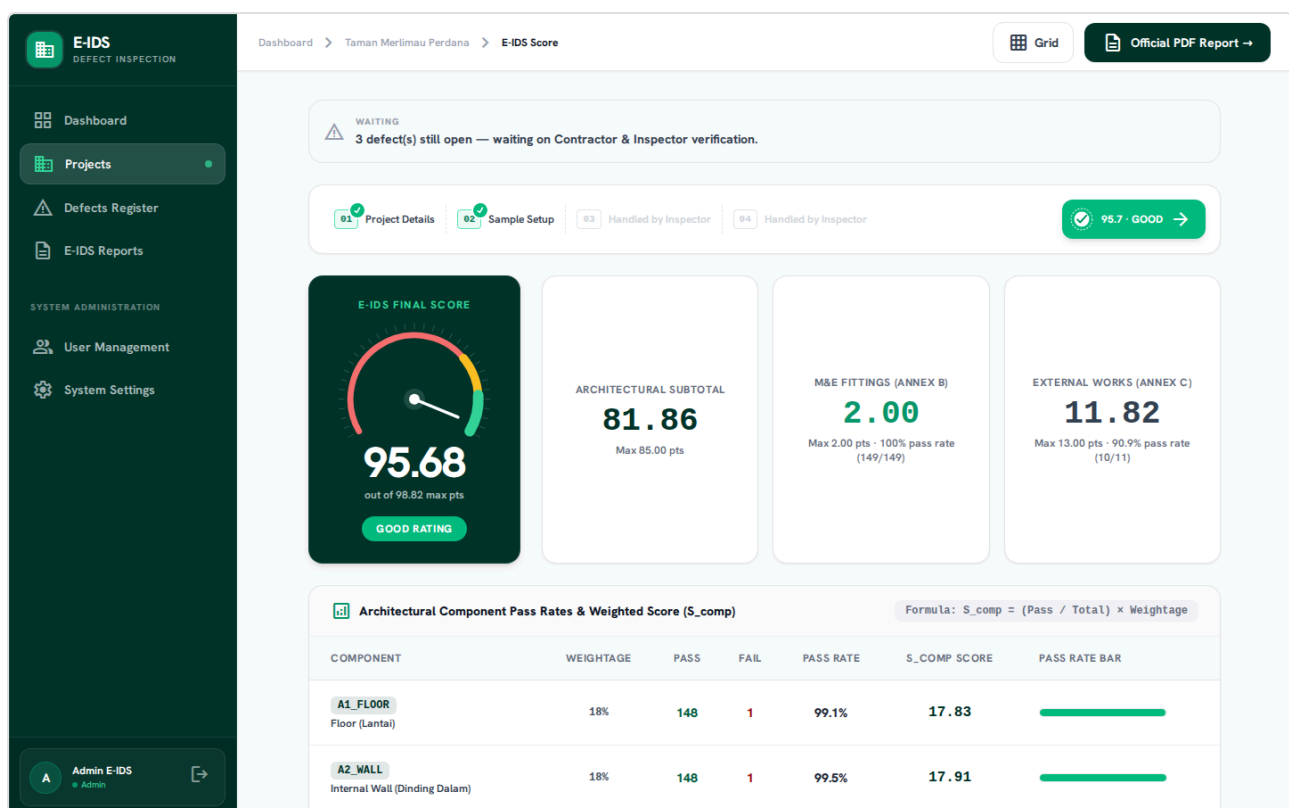

6. Step-by-Step: Your Workflow as Admin

A. Register a new project

- Navigate to **Projects** → click **+ New Project**.
- Enter Project Ref No., Project Name, Developer, Contractor, Building Type, and **CIS 7:2021 Building Category** (Step 1 of 2 in the setup wizard).

3. Enter **Total Project GFA (m²)** — the whole project's combined floor area, not a single unit's. Sample units auto-calculate via Table 3's clamped formula.
4. Select the **Assigned Inspector** and **Assigned Contractor**.
5. Click **Create Project & Initialize Samples**.

E-IDS DEFECT INSPECTION

Dashboard > Projects > New Project

Project Specifications & Metadata

PROJECT REFERENCE NO. *

PROJECT NAME *

SITE LOCATION / ADDRESS

DEVELOPER NAME *

CONTRACTOR NAME *

BUILDING TYPE *

CIS 7:2021 BUILDING CATEGORY *

INITIAL STATUS *

ASSIGNED INSPECTOR

ASSIGNED CONTRACTOR

TOTAL PROJECT UNITS *

Sample Unit Calculation
Formula (Table 3, per building category): $N = \text{clamp}(\text{ceil}(\text{GFA} \div \text{divisor}), \text{min}, \text{max})$

B. Finish sample setup and hand off

1. On **Sample Setup** (Step 2 of 2), samples are pre-distributed across units and pre-named per CIS 7:2021 §1.7.
2. Adjust room names, location type, and mark whether Car Park / Apron & Perimeter Drain exist.
3. Click **Save Project**, confirm the modal, and you land on the **Project Dashboard**. Your Inspector can now begin.

E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Admin E-IDS

Admin

Dashboard > Projects > Taman Merlimau Perdana > Configure Samples

01 Project Details

02 Sample Setup

03 Components Grid

04 Inspection

95.7 GOOD

Sample Units Configuration

Formula (Table 3): $N = \text{clamp}(\text{ceil}(\text{Total GFA} / 70), 30, 700) = 150$ sample units, distributed across 50 unit(s). Assign a room or location name to each sample unit. The assigned inspector will perform the component inspection separately.

Optional Elements Present in This Project

If an element doesn't exist on this project, its Table 2 weightage is automatically redistributed across the rest.

Car Park / Car Porch

Apron and Perimeter Drain

Sample Units Location Assignment (150)

Total GFA: 10,500.00 m²


#1	Unit #1	Living Room	Principal	Inspected
#2	Unit #1	Service Area	Service	Inspected
#3	Unit #1	Passageway	Circulation	Inspected
#4	Unit #1	Bedroom 1	Principal	Pending

C. Monitor and intervene

1. Open the project anytime to see the **Case Ledger** — Setup & Assignment, Field Inspection, Defect Rectification, Final Certificate — each row shows whose turn it is.
2. If inspection is done but defects remain open, click **Notify Contractor** on the Defect Rectification row, confirm the modal, and the Contractor sees them flagged.
3. You can perform any Inspector-facing action yourself if needed.

D. Sign off and export the certificate

1. Once every defect is **RESOLVED**, click **Sign Off Project** (you or your Inspector can do this).
2. Confirm the modal — the project status becomes **Completed**.
3. Click **Generate Official PDF Report** (a small print-style link) for the signed certificate, including QP Declaration status and Detailed Findings.

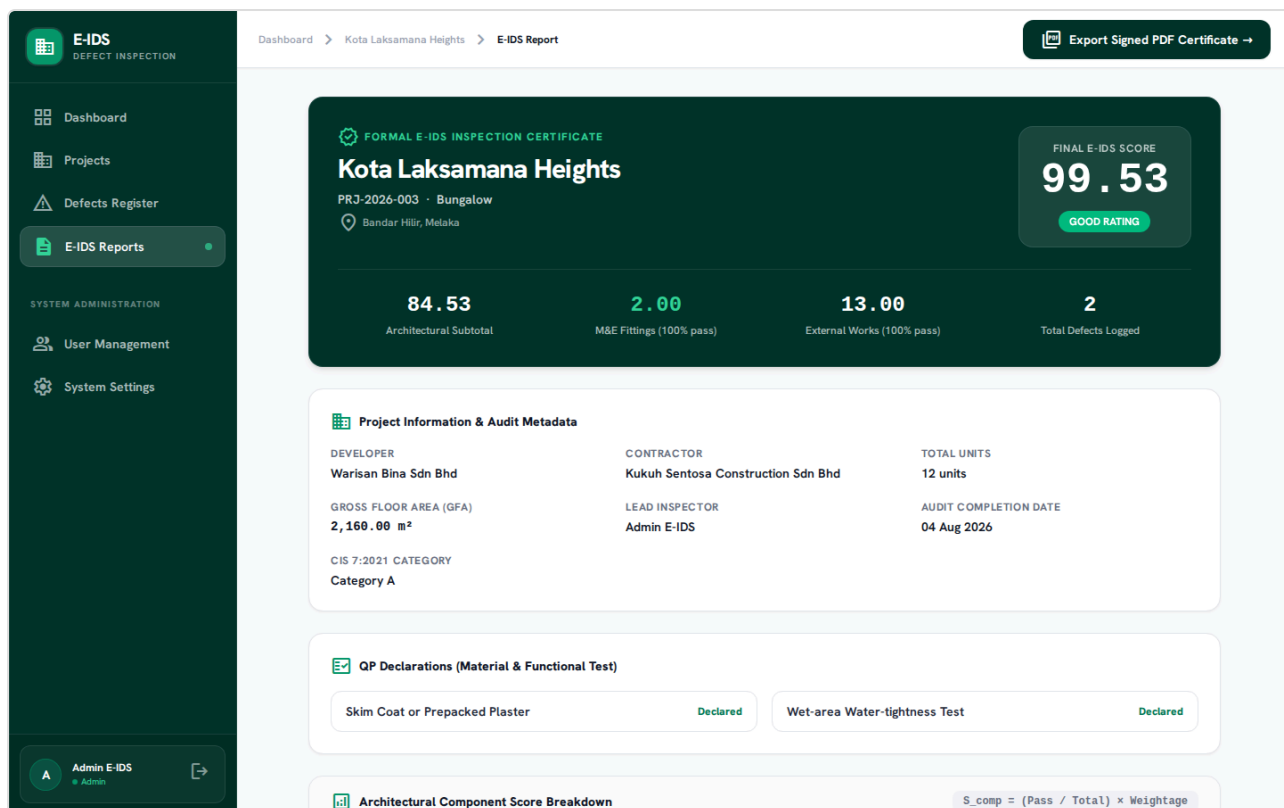

7. Managing the Question Bank & Guide Content

Settings → **Question Bank** lists every architectural component's checklist. Click a component tab, then **Edit** on any question to change its text, defect group, method/tool, tolerance, or input type.

E-IDS
DEFECT INSPECTION

- Dashboard
- Projects
- Defects Register
- E-IDS Reports

SYSTEM ADMINISTRATION

- User Management
- System Settings

A Admin E-IDS
Admin

Dashboard > Settings > Question Bank

A1_FLOOR A2_WALL A3_CEILING A4_DOOR A5_WINDOW A6_FIXTURES A7_ROOF A8_EXT_WALL A9_APRON_DRAIN A10_CAR_PARK

Floor (Lantai) — 17 question(s)

#	QUESTION	GROUP	TYPE	GUIDE	EDIT
1	No construction stains on the floor surface.	Finishing	Pass/Fail	—	Edit
2	Floor colour and tone are uniform.	Finishing	Pass/Fail	—	Edit
3	Floor surface is smooth and even (not rough or patchy).	Finishing	Pass/Fail	—	Edit
4	No foreign materials on the floor surface.	Finishing	Pass/Fail	—	Edit
5	Floor finish texture is consistent.	Finishing	Pass/Fail	—	Edit
6	Paint finish (if applicable) is good without brush marks, blisters or peeling.	Finishing	Pass/Fail	—	Edit
7	Floor levelness is within the tolerated limit.	Alignment and Evenness	Numeric ($\leq 3 \text{ mm} / 1.2 \text{ m}$)	Yes	Edit
8	Floor slope in wet areas is in the correct direction.	Alignment and Evenness	Pass/Fail	—	Edit
9	Joints are aligned with skirting or walls.	Alignment and Evenness	Pass/Fail	—	Edit
10	Joints between tiles are straight and aligned.	Alignment and Evenness	Pass/Fail	—	Edit
11	Lippage between two tiles is within the allowable limit.	Alignment and Evenness	Numeric ($\leq 1 \text{ mm}$)	—	Edit
12	No protrusion or uneven spots that could cause tripping.	Alignment and Evenness	Pass/Fail	—	Edit

Each question also has an optional **Guide** section — a rich-text editor (bold, lists, links, inline images) for Tools Needed, Inspection Procedure, and Result Thresholds. Leave it blank to keep the "?" icon hidden.

E-IDS
DEFECT INSPECTION

[Dashboard](#) >
 [Settings](#) >
 [A1_FLOOR](#) >
 [Edit Question](#)

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Question - A1_FLOOR

QUESTION TEXT *

Floor levelness is within the tolerated limit.

DEFECT GROUP *

Alignment and Evenness

SORT ORDER *

7

METHOD / TOOL

Spirit Level 1.2 m + Steel Wedge

INPUT TYPE *

Numeric with Tolerance
▼

TOLERANCE TEXT (DISPLAY)

≤ 3 mm / 1.2 m

TOLERANCE MAX (MM, USED FOR AUTO PASS/FAIL)

3.00

Guide Content (optional — the “?” icon only shows when this is filled in)

Format freely — bold, lists, and inline images all render exactly as shown here in the inspector's Guide popup.

TOOLS NEEDED

B I U

Spirit Level 1.2 m

Steel Wedge (Feeler Gauge)

INSPECTION PROCEDURE

D T H L A R T E R S P E C I O N S

A

Admin E-IDS
• Admin

8. Weightage & Sampling Settings

Settings exposes CIS 7:2021's reference tables directly, editable per Building Category:

E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Admin E-IDS

Admin

Dashboard > System Settings

E-IDS Rating Thresholds

GOOD Rating Threshold

Projects scoring at or above this value are rated GOOD.

85pts

MODERATE Rating Threshold

Projects scoring at or above this value (but below GOOD) are rated MODERATE.

70pts

Default Sample Location Names

7 location(s)

Pre-filled location names assigned to samples when a new project is created.

Living Room

Service Area

Passageway

Bedroom 1

Bedroom 2

Bedroom 3

Bathroom

Enter location name (e.g. Master Bedroom, Living Room)...

+ Add Location

Changes take effect immediately for all new projects and scoring logic.

Save All Settings

CIS 7:2021 — Overall Weightage by Building Category (Table 1)

CATEGORY	ARCHITECTURAL %	M&E %	EXTERNAL %
----------	-----------------	-------	------------

- **Table 1** — overall Architectural/M&E/External % split by Building Category.
- **Table 4** — Principal/Service/Circulation location weighting by Building Category.
- **Table 3** — sample count formula (GFA divisor, min/max samples) by Building Category.
- **Table 2** — architectural component weightage, including the two QP declaration rows.

Changes apply immediately to scoring on every project — there's no need to re-create existing projects.

9. Demo / Testing Accounts

Running `docker exec -w /var/www eidsv2 php artisan migrate:fresh --seed` loads a ready-to-test dataset.

Role	Account	Password	Scope
Admin	admin@eids.gov.m y	password	Sees everything; created all three projects

Role	Account	Password	Scope
Inspector	inspector.a@eid s.gov.my	password	Assigned to Project 1 and Project 3
Inspector	inspector.b@eid s.gov.my	password	Assigned to Project 2 only
Contractor	contractor.a@eid s.gov.my	password	Assigned to Project 1 only
Contractor	contractor.b@eid s.gov.my	password	Assigned to Project 2 and Project 3

Project 1 — "Taman Merlimau Perdana" (PRJ-2026-001): Category A, 50 units, 150 samples, score **95.68 — GOOD**. Carries a hand-built defect narrative — one defect in each of the four lifecycle states.

Project 2 — "Desa Aman Villa" (PRJ-2026-002): Category A, 20 units, 38 samples, score **87.74 — GOOD**. No Car Park — demonstrates Table 2 weightage redistribution.

Project 3 — "Kota Laksamana Heights" (PRJ-2026-003): Category A, 12 units, 31 samples, score **99.53 — GOOD**. Fully signed off — use this one to see the unlocked certification seal, the fully-stamped Case Ledger, and the Official PDF Certificate.