


E-IDS v2 — Inspector Manual

Electronic Inspection Defect System (E-IDS v2) *Operational Manual for Field Inspectors*


Updated 2026-08-06. This is the Inspector-focused edition of the full E-IDS v2 User Manual — everything you need for site inspection, the defect cycle, and sign-off. System configuration (question bank, weightage tables, user accounts) is managed by your Admin and isn't covered here. A few screenshots below predate the latest UI refresh (button labels changed) — the described behavior is current.

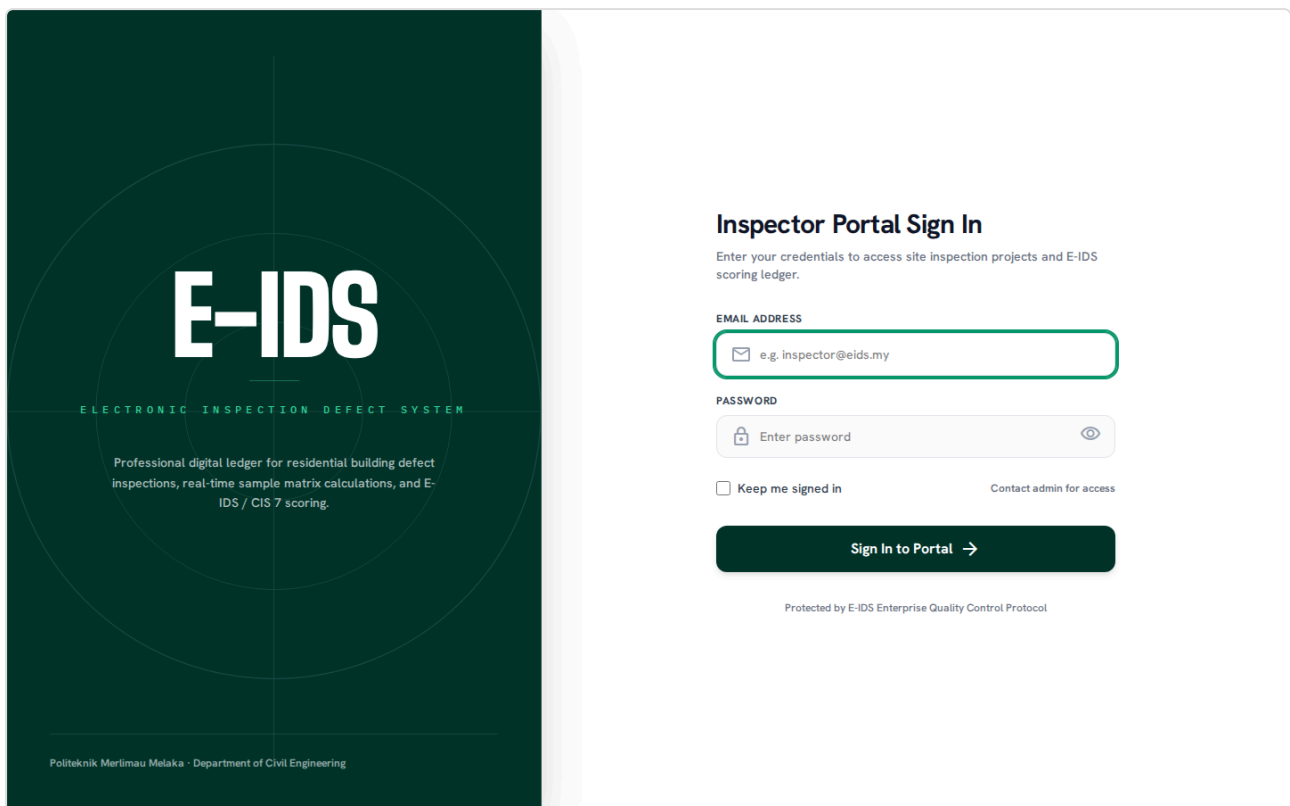


The sign-in screen every role shares — the same login form routes you to your own scoped view of the system.

1. System Overview

E-IDS v2 digitises building defect inspection for the Malaysian construction sector under **CIS 7:2021**. As Inspector, you're the field role: once an Admin registers a project and assigns it to you, everything from sample setup through the actual site checklist is your job.

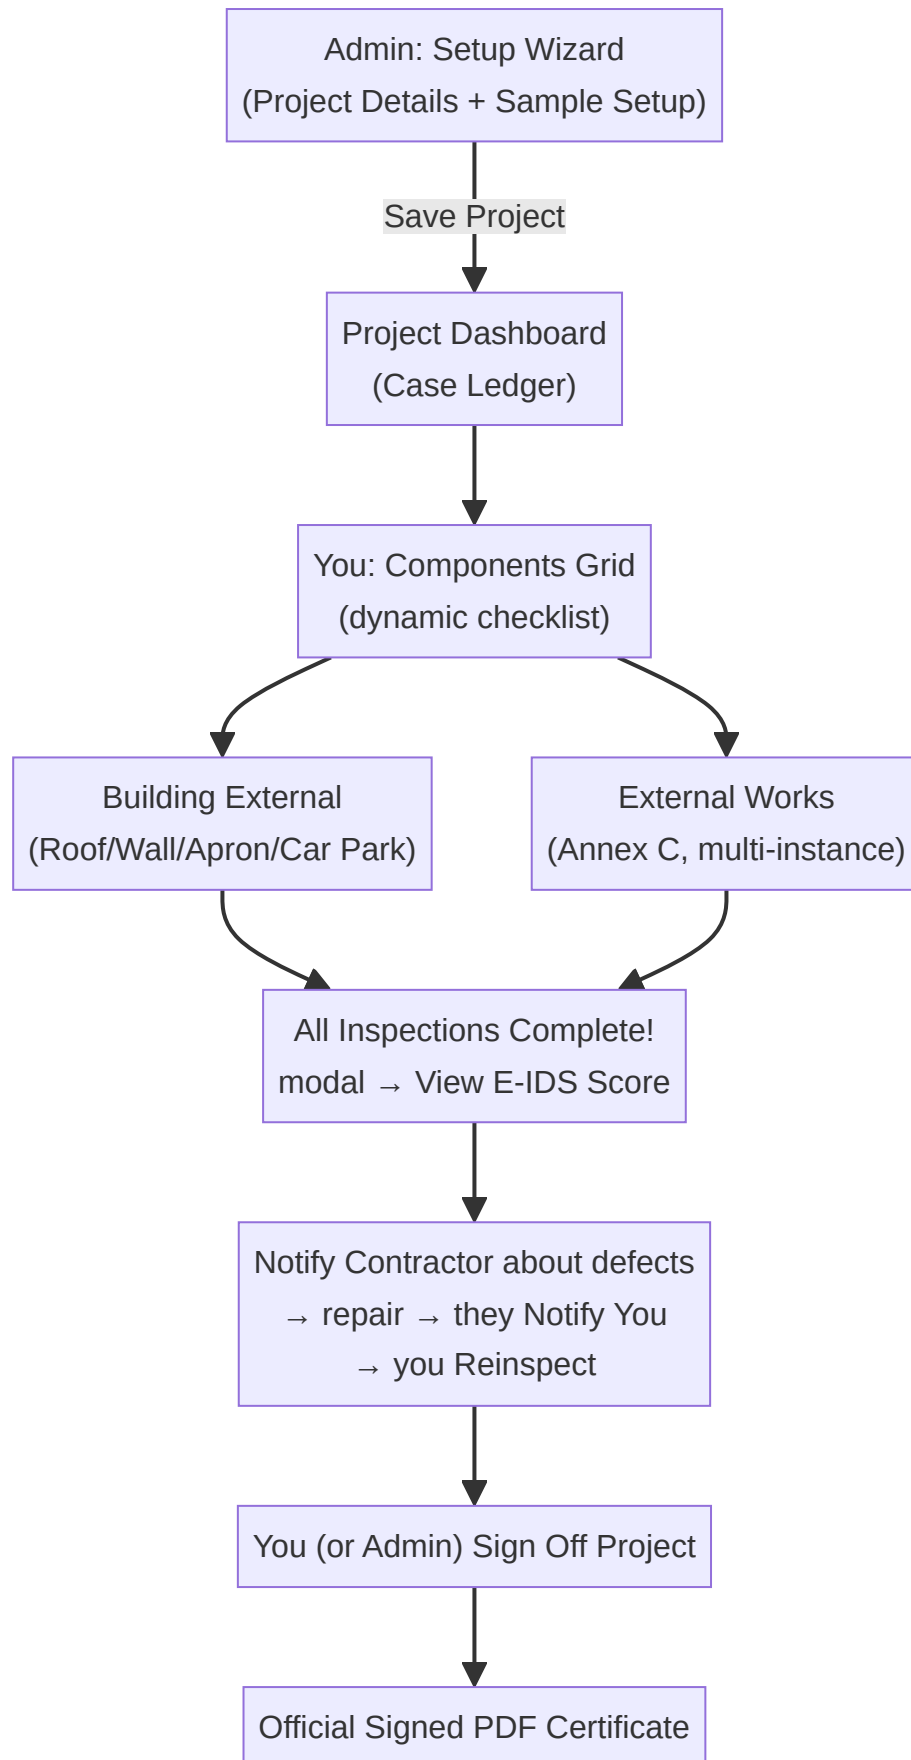

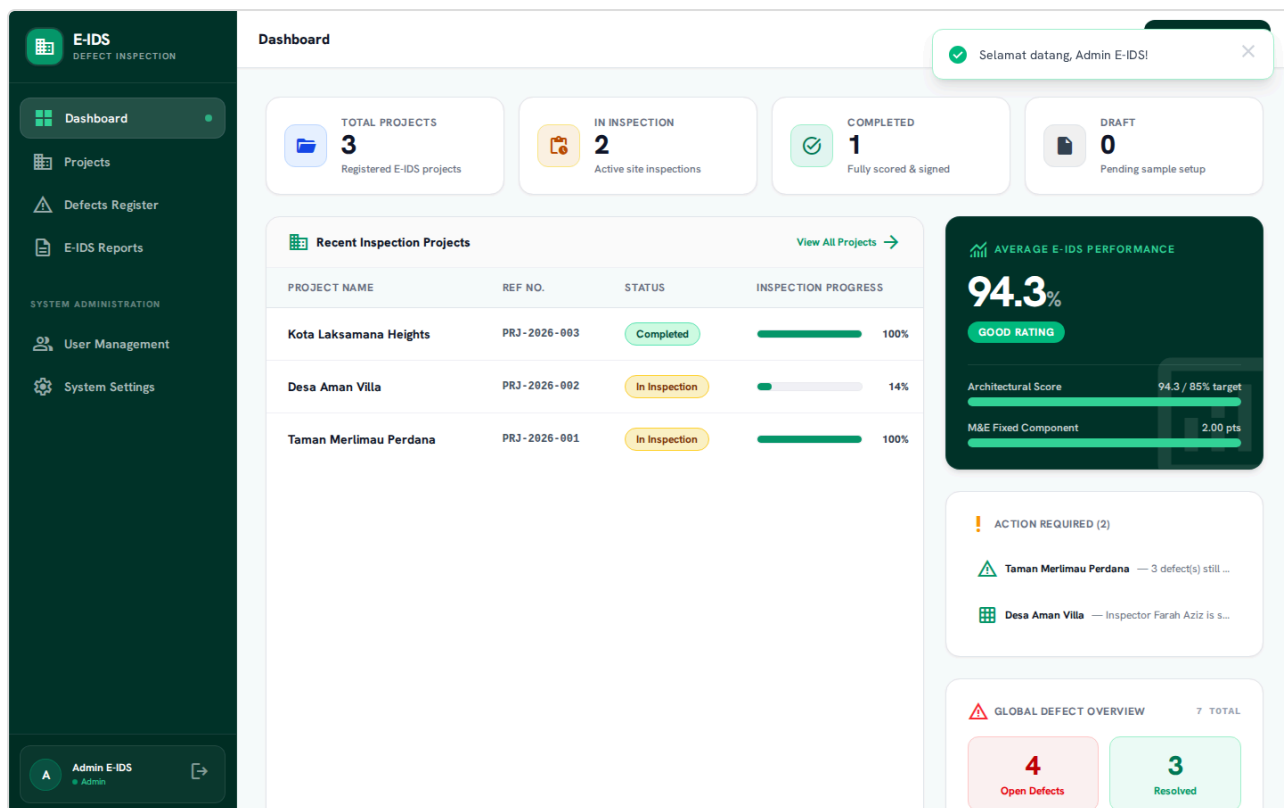

Your landing page after login — an Action Required list of everything across your assigned projects that needs attention right now.

2. Your Role, and Everyone Else's


- **You (Inspector).** The field role. You see only the projects you're assigned to (or unassigned ones open to any inspector), and own everything that happens on site: naming sample locations, running the Components Grid checklist room by room, completing Building External and External Works, uploading photo evidence, and reinspecting a Contractor's repair before confirming it resolved. You can also **Sign Off** a project yourself once every defect is closed — you don't have to hand that final step to an Admin.
- **Admin.** Registers the project, assigns you and the Contractor, and holds system configuration (question bank content, weightage tables, user accounts). Can step into any of your screens if needed, but day-to-day inspection is your job.
- **Contractor.** Logs in directly to their scoped **My Defects** list — no Dashboard or Projects access. Their job: get notified about a defect you flagged, repair it, mark it settled (which notifies you to reinspect), and repeat. They can never mark their own work fully **RESOLVED** — that confirmation is always yours.

What You Can and Can't Do

Action / Capability	You (Inspector)
View Dashboard, Projects & Reports	✓ assigned projects only
Download Official PDF Report	✗ (view the score, PDF export is Admin's)
Register & Edit Projects	✓
Assign the Inspector	✗ (locked to yourself)
Assign the Contractor	✓
Configure Sample Locations & Optional Elements	✓
Perform Component Inspection Checklists	✓
Add/Remove External Works Instances	✓
Declare QP Certifications	✓
Upload Photo Evidence	✓
View Defects Register	✓ assigned projects
Create / Manually Log a Defect	✓
Notify Contractor about Open Defects	✓
Confirm RESOLVED or Reject a repair	✓
Sign Off Project	✓
Manage Users, Weightage Tables, Question Bank	✗ (Admin only)
Delete Project	✗ (Admin only)

⚠ Important Opening a project or defect you're not assigned to — from a list or by typing the URL directly — returns "Forbidden." This is enforced the same way across every screen.

3. Defect Lifecycle & Status Workflow

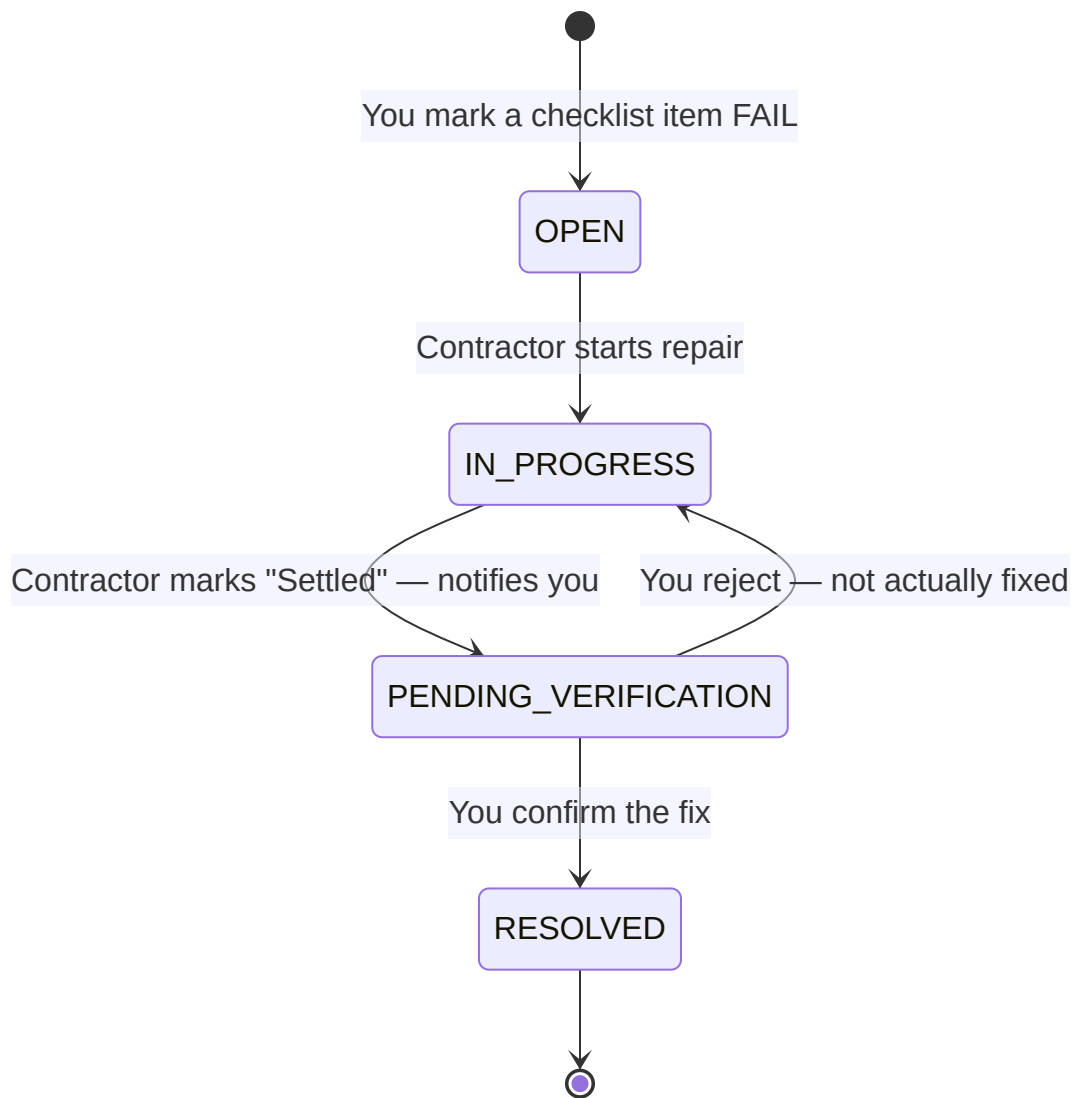

⚠ Important The final **RESOLVED** confirmation — and the ability to reject a repair back to **IN_PROGRESS** — is yours (or Admin's) alone. A Contractor can never self-certify their own work as fully resolved, so this step never gets skipped.

1. ☐ **OPEN** — auto-created the moment you mark a checklist question **FAIL** . Immediately visible to the assigned Contractor.
2. ☐ **IN_PROGRESS** — the Contractor clicks **Start Repair** on site.
3. ☐ **PENDING_VERIFICATION** — the Contractor clicks **Mark Settled**, which notifies you the repair is ready to check. They can't advance it further from here.
4. ☐ **RESOLVED** — you re-inspect on site and click **Confirm Resolved**, or **Reject – Not Fixed** to send it back for another attempt.

E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Admin E-IDS

Dashboard > Defects Register

Search component, location or defect

All Projects

All Severities

All Statuses

Filter

DEFECT / LOCATION	PROJECT	SEVERITY	STATUS	ACTIONS
Ceiling (Siling) Living Room FAIL on A3_CEILING (Ceiling (Siling)) at Living Room.	PRJ-2026-003 Kota Laksamana Heights	Low	Resolved	Reopen
Internal Fixtures Service Area FAIL on A6_FIXTURES (Internal Fixtures) at Service...	PRJ-2026-003 Kota Laksamana Heights	Low	Resolved	Reopen
Door (Pintu) Living Room FAIL on A4_DOOR (Door (Pintu)) at Living Room.	PRJ-2026-002 Desa Aman Villa	Low	Open	Start Repair
Roof (Bumbung) Roof (Bumbung) - Section 1 FAIL on A7_ROOF (Roof (Bumbung)) at Roof...	PRJ-2026-001 Taman Merlimau Perdana	Medium	Resolved	Reopen
Internal Wall (Dinding Dalam) Living Room FAIL on A2_WALL (Internal Wall (Dinding Dalam)) at...	PRJ-2026-001 Taman Merlimau Perdana	Medium	Open	Start Repair
Window (Tingkap) Living Room FAIL on A5_WINDOW (Window (Tingkap)) at Living...	PRJ-2026-001 Taman Merlimau Perdana	Low	In Progress	Mark Settled
Floor (Lantai) 	PRJ-2026-001		Pending	Confirm Resolved Reject - Not Fixed

4. Component Inspection — The Dynamic Checklist

There is no fixed 5-point checklist applied uniformly to every component. Each of the 8 architectural components (Floor, Internal Wall, Ceiling, Door, Window, Internal Fixtures, Roof, External Wall) has its **own** question bank straight out of CIS 7:2021's Annex A — Floor alone has 17 questions.

E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

A

Admin E-IDS

Admin

Dashboard

Taman Merlimau P...

Grid

Living Room / A1_FLOOR

01Project Details

02Sample Setup

03Components Grid

04Inspection

95.7GOOD

Existing assessment loaded for A1_FLOOR

Last saved 3 hours ago

TAMAN MERLIMAU PERDANA · COMPONENT 1 OF 7

Floor (Lantai) (A1_FLOOR)

Unit #1 · Living Room · Sample #1

ARCHITECTURAL WEIGHT

18.0%

CALCULATED COMPONENT RESULT

PASS


Inspection Checklist (17 Questions)

NO.	INSPECTION QUESTION	METHOD / TOOL	LIMIT	GUIDE	RESULT
1	No construction stains on the floor surface.	Visual	-	—	PASS FAIL
2	Floor colour and tone are uniform.	Visual	-	—	PASS FAIL
3	Floor surface is smooth and even (not rough or patchy).	Visual	-	—	PASS FAIL
4	No foreign materials on the floor surface.	Visual	-	—	PASS FAIL

Which physical unit, which room, and a full checklist table — Question / Method-Tool / Limit / Guide / Result. Numeric questions take a measurement and auto-derive PASS/FAIL against the tolerance; everything else is a PASS/FAIL toggle.


The Guide "?" Icon

Any question can have optional Guide content — tools needed, numbered inspection steps, the CIS 7:2021 limit, result thresholds, and inline reference photos. It only appears when your Admin has filled it in for that question.

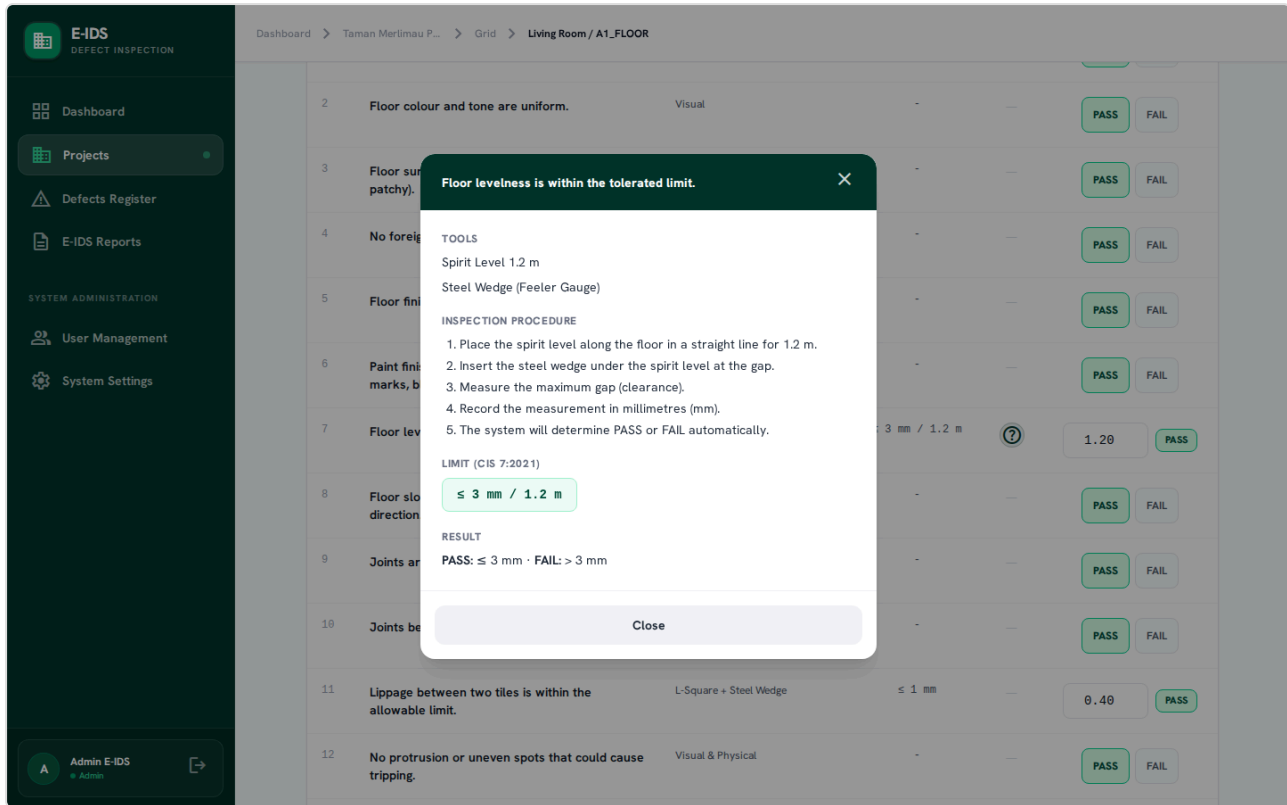

Two Kinds of Architectural Components

- **Room-scoped** (Floor, Internal Wall, Ceiling, Door, Window, Internal Fixtures) — inspected at each sample room, in the main **Components Grid**.
- **Building-scoped** (Roof, External Wall, Apron & Perimeter Drain, Car Park) — sampled as building-level sections, on their own "**Roof / Wall / Apron / Car Park**" page. Sample count scales with the project's unit count.

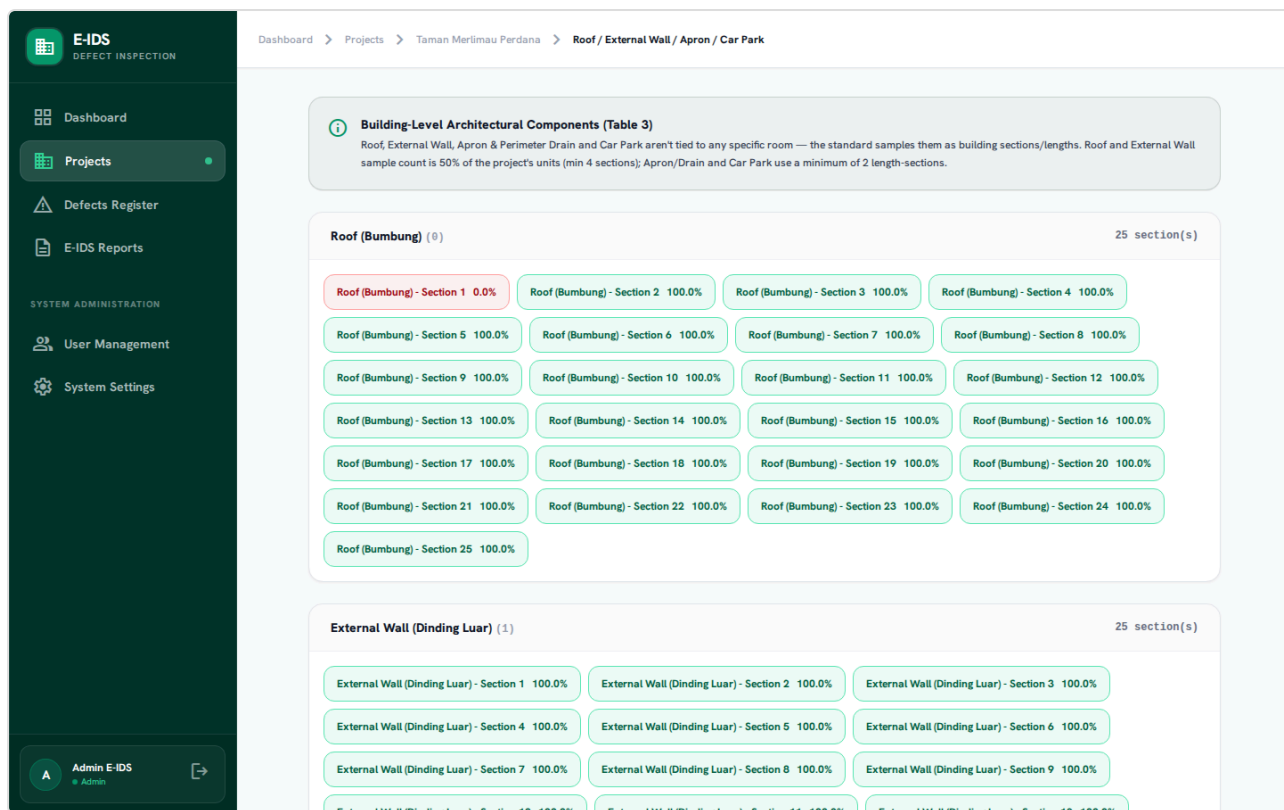

5. M&E Fittings & External Works (Annex B & C)

M&E Fittings (Annex B) get their own 6-question checklist, assessed at the same room samples as the architectural components — you'll see an "M&E Fittings" tile alongside Floor/Wall/etc. in the Components Grid.

External Works (Annex C) — Link-way/Shelter, External Drain, Roadwork, Footpath & Turfing, Fence & Gate, Playground, Court, Swimming Pool — live on their own page and support **multiple instances** of the same element.

E-IDS

DEFECT INSPECTION

Dashboard

Projects

Defects Register

E-IDS Reports

SYSTEM ADMINISTRATION

User Management

System Settings

Admin E-IDS

Admin

Dashboard > Projects > Taman Merlimau Perdana > External Works

External Works (Annex C)

Add or remove instances of each external element this project has (e.g. 3 separate playgrounds) — each instance gets its own full Table 6 sample set. The External Works score is a flat pass-rate across every instance's checklist answers.

Infrastructure

Link-way / Shelter

1 instance(s) · 2 sample section(s) each, per Table 6

+ Add Link-way / Shelter

Link-way / Shelter #1 100.0%

Link-way / Shelter #2 100.0%

×

External Drain

1 instance(s) · 2 sample section(s) each, per Table 6

+ Add External Drain

External Drain #1 0.0%

External Drain #2 100.0%

×

Roadwork (incl. Parking Bay)

1 instance(s) · 2 sample section(s) each, per Table 6

+ Add Roadwork (incl. Parking Bay)

Roadwork (incl. Parking Bay) #1 100.0%

Roadwork (incl. Parking Bay) #2 100.0%

×

Footpath and Turfing

1 instance(s) · 2 sample section(s) each, per Table 6

+ Add Footpath and Turfing

Footpath and Turfing #1 100.0%

Footpath and Turfing #2 100.0%

×

Fence and Gate

+ Add Fence and Gate

Click "Add [Element]" to generate another full instance; click the red "x" to remove one — this permanently deletes that instance's data.


QP Declarations — Skim Coat/Prepacked Plaster and Wet-area Water-tightness aren't inspected on-site; attach the evidence document on the project page's QP Declarations card to earn their weightage.

6. E-IDS Scoring Framework (CIS 7:2021)

$$S_{\text{total}} = S_{\text{arch}} + S_{\text{ME}} + S_{\text{external}}$$

- **Architectural Subtotal:** each component's pass rate × its Table 2 weightage, further weighted across sample locations by Table 4 (Principal/Service/Circulation). If an optional element (Car Park, Apron/Drain) doesn't exist, its weightage redistributes automatically — the project isn't penalized for lacking it.
- **M&E Subtotal:** flat pass rate across every M&E answer, × the category's M&E %.
- **External Subtotal:** flat pass rate pooled across every present External Works instance, × the category's External %.

□ **Note** □ **GOOD:** ≥ 85.00 pts · □ **MODERATE:** ≥ 70.00 and < 85.00 · □ **WEAK:** < 70.00 (your Admin can adjust these thresholds)

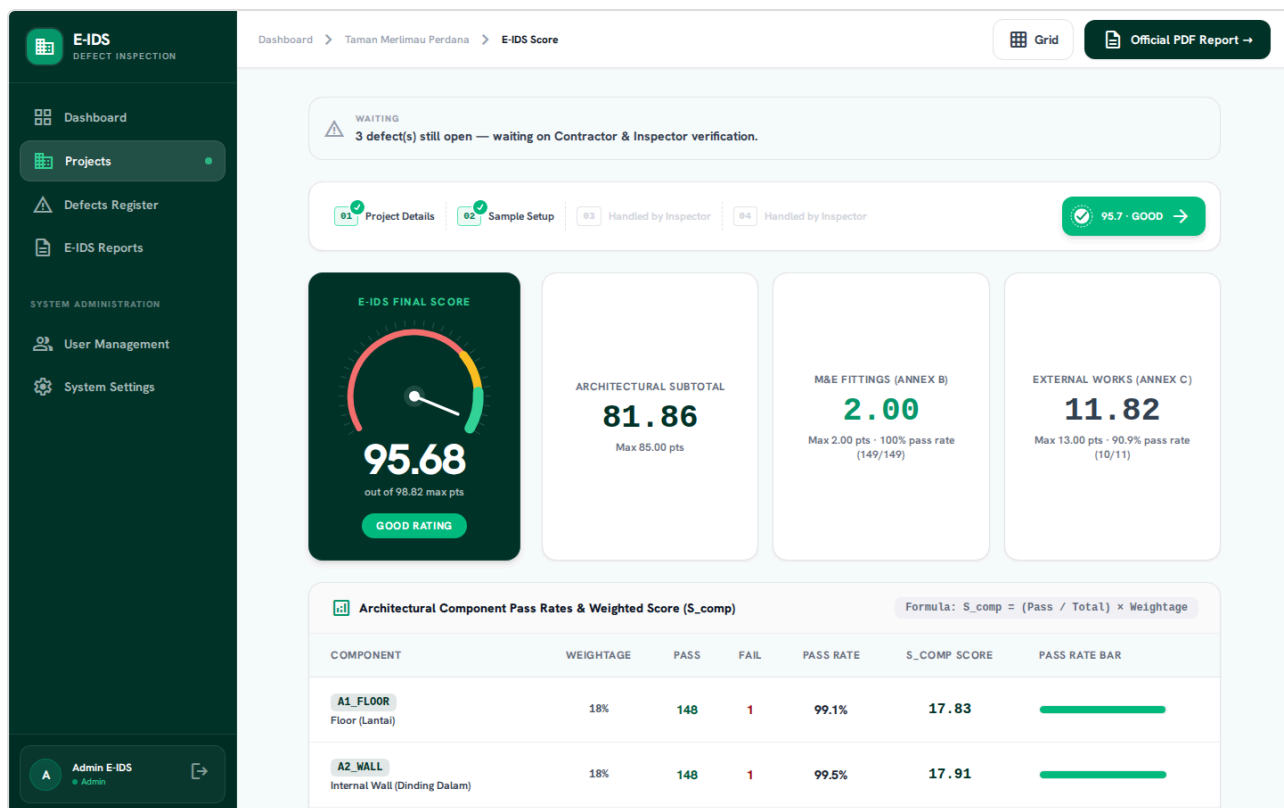

The first time you open the score for a project, the gauge sweeps in and the total counts up; after that it renders instantly.

7. Step-by-Step: Your Workflow as Inspector

A. Find your assigned work

1. Log in — you land on the **Dashboard**, with an **Action Required** list of everything across your assigned projects that needs attention right now.
2. Open a project from there, or from **Projects**, to reach its dashboard and Case Ledger.

B. Run the Components Grid

1. From the project dashboard, open **Components Grid** — each room-scoped component (plus M&E Fittings) gets its own tile per sample.
2. Click a tile to open its full checklist. Answer PASS/FAIL, or enter a measurement for numeric questions. Tap "?" for Guide content where available.
3. Upload photo evidence if a defect is found, then **Save & Next** to advance through the component's list, then the next component.
4. From the Grid's action bar, also complete **Roof / Wall / Apron / Car Park** and **External Works** — both required before sign-off.

5. When you submit the very last outstanding inspection, an **"All Inspections Complete!"** modal appears with **View E-IDS Score** → — click it whenever you're ready.

C. Work the defect cycle

1. Once inspection is done and defects remain open, go to the project dashboard and click **Notify Contractor** so the assigned Contractor sees them flagged.
2. When the Contractor marks a defect **Mark Settled**, it moves to `PENDING_VERIFICATION` and shows on your Dashboard's Action Required list and in the **Defects Register** (filter to `Pending Verification`).
3. Re-inspect the location, then click **Confirm Resolved** or **Reject – Not Fixed**.

D. Review the score and sign off

1. Once every checklist is inspected, open **E-IDS Score** to review the final score and breakdown.
2. If any defect is still open, the score page and PDF report stay locked with an explanatory message — clear the defect cycle above.
3. Once every defect is `RESOLVED` , return to the project dashboard and click **Sign Off Project** yourself — confirm the modal, and the project is marked Completed.

8. Demo / Testing Accounts

Role	Account	Password	Scope
Inspector	inspector.a@eid s.gov.my	password	Assigned to Project 1 and Project 3
Inspector	inspector.b@eid s.gov.my	password	Assigned to Project 2 only

Project 1 — "Taman Merlimau Perdana": carries a hand-built defect narrative — one defect in each of the four lifecycle states, good for testing the full reinspection cycle. **Project 3 — "Kota Laksamana Heights"** is fully signed off — open it to see the completed Case Ledger and Official PDF Certificate.